


# USG GLACIER™ BASIC ACOUSTICAL PANELS

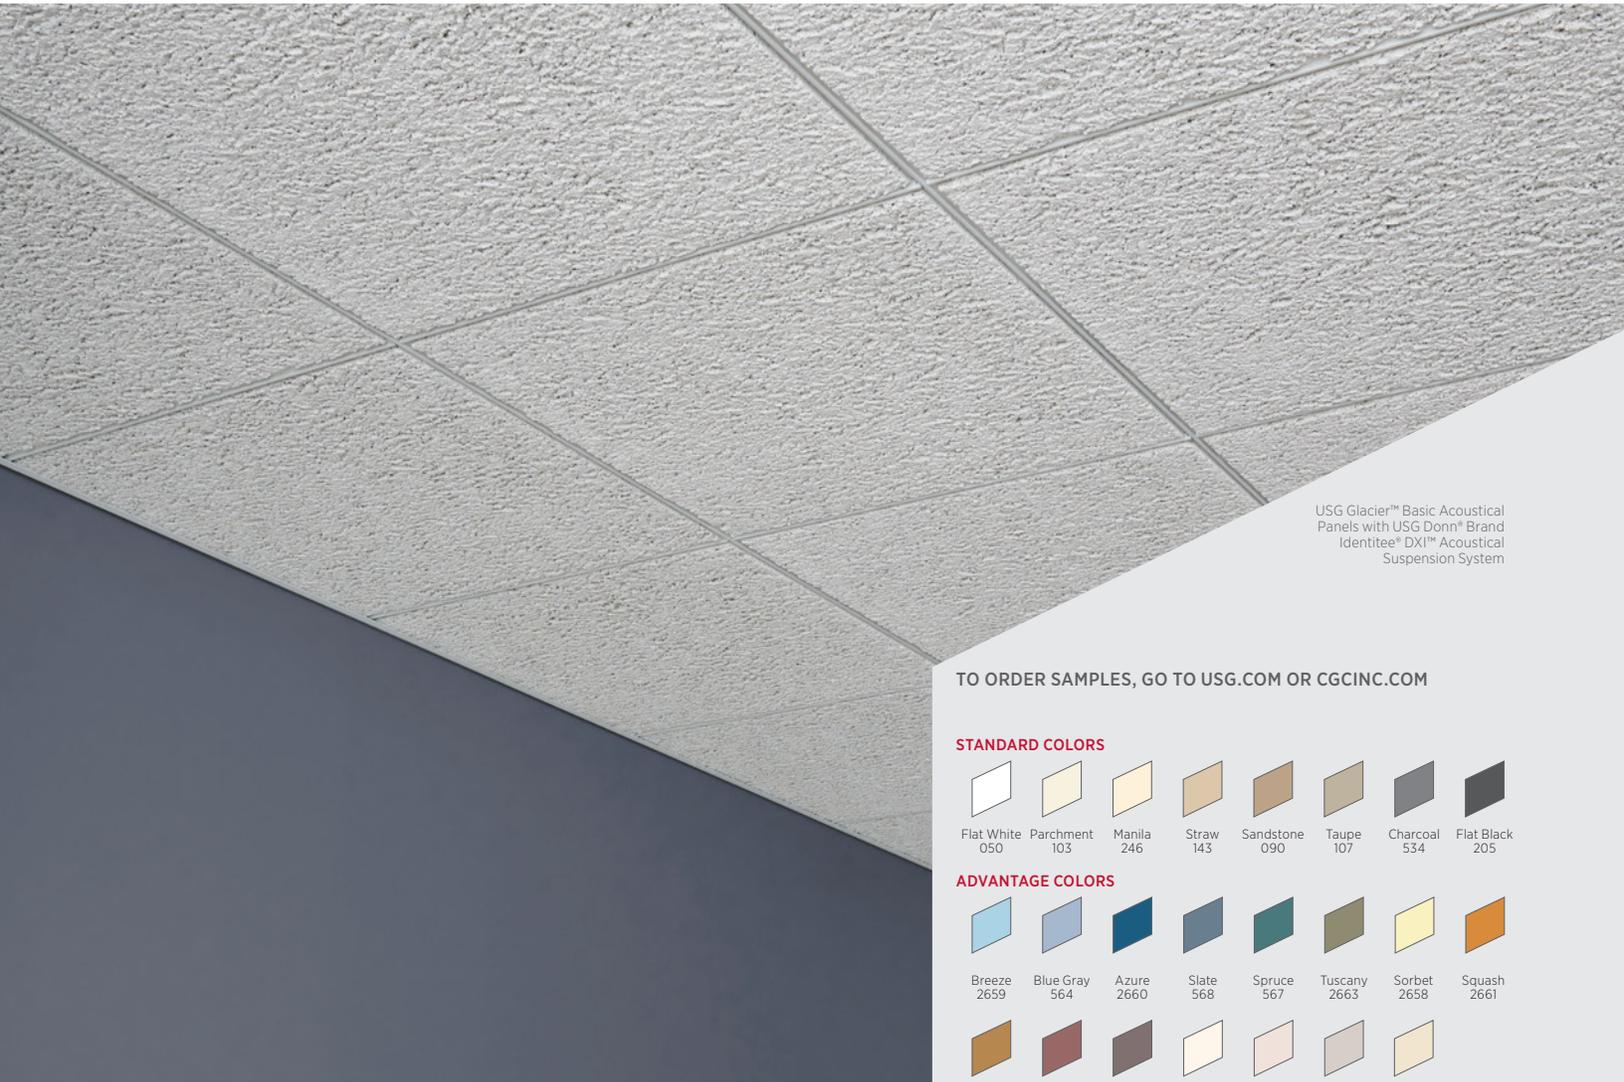


USG Glacier™ Basic Acoustical Panels with USG Donn® Brand Identitee® DXI™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

## STANDARD COLORS



## ADVANTAGE COLORS

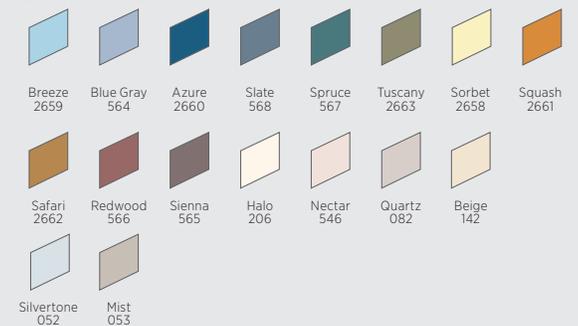

## PREMIUM COLORS



Limited color options available. See Ceiling Solutions Color Program for details.

## FEATURES AND BENEFITS

- Heavily textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- VOC emissions meet CA Specification 01350.
- USDA Certified Biobased Product.<sup>5</sup>
- Integral color masks nicks and scratches and enhances lifelong panel appearance.
- Optional Firecode® product designed to meet life-safety codes.
- USG Glacier™ Basic Acoustical Panels are part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to [USG.com](http://USG.com) or [CGCInc.com](http://CGCInc.com).

## APPLICATIONS

- Food courts
- Hospitality
- Libraries
- Restaurants

## SUBSTRATE

- Cast mineral fiber

# USG GLACIER™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE  
 USG: usg.com or samplitt@usg.com  
 CGC: contact Sales Representative

TECHNICAL SERVICES  
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
 TECHNICAL INFORMATION  
 AND LEED REPORT TOOL  
 usgdesignstudio.com  
 cgcdesignstudio.com



PRODUCT CERTIFIED  
 FOR LOW CHEMICAL  
 EMISSIONS:  
 ULCOM/GG  
 UL 2818



## USG GLACIER™ BASIC PANELS

Edge	Panel Size	Fire Rating <sup>2,7</sup>	Item No.	NRC	CAC Min.	LR <sup>3</sup>	Color <sup>4</sup>	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content <sup>1</sup>	Panel Cost
SL 	2'x2'x3/4" Paper-Back	Class A	<b>707</b>	0.65	35	0.70	White Standard Advantage Premium	A	Low		69%	\$\$\$
	2'x2'x3/4" Paper-Back	Class A	<b>715</b>	0.65	35	0.70	White	B	Low		71%	\$\$\$
	2'x4'x3/4" Paper-Back	Class A	<b>711</b>	0.65	35	0.70	White	A	Low		69%	\$\$\$
FL 	2'x2'x3/4" Paper-Back	Class A	<b>708</b>	0.65	35	0.70	White Standard Advantage Premium	C, D, E, F	Low		69%	\$\$\$

### Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

### High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

### Firecode®

Abuse Resistant

## GRID PROFILE OPTIONS

A USG DX®	B USG DXL™	C USG Centricitee™ DXT™	D USG Fineline® DXF™	E USG Fineline® 1/8 DXFF™	F USG Identitee® DXI™

## PHYSICAL DATA

**Product literature**  
 Data sheet: SC1819

**ASTM E1264 classification**  
 ASTM E1264-22 Type III, Form 4, Pattern F  
 ASTM E1264-23 Type A, Form A1.4, Pattern F

**ASTM E84 and CAN/ULC S102 surface-burning characteristics**  
 Class A  
 Flame spread: 25 or less  
 Smoke developed: 50 or less

**UL Type**  
 AP, AP-1, AP-2, AP-3

**Weight**  
 1.47 lb./sq. ft. (Class A panels)  
 1.52 lb./sq. ft. (Firecode® panel)

**Online tools**  
 usgdesignstudio.com or cgcdesignstudio.com

**Thermal resistance**  
 R-1.7 (Class A)  
 R-1.3 (Firecode®)

**Maximum backloading**  
 See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

**Texture**  
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

### Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- Firecode® products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation.
- LR values are shown as averages.
- See Colors selector for more information.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
- Select custom color panels are available in limited sizes and edge profiles. Minimum order quantities apply. Please contact your local sales representative for availability, pricing, minimum order quantities and lead times.
- It is not recommended to mix Firecode™ with Class A panels in the same ceiling plane

### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1819/rev. 3-24  
 © 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by  
 USG Interiors, LLC  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, GLACIER, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

