

ALUMINUM OPEN CELL CEILINGS


Our aluminum open cell ceiling range meet the designer needs and satisfy the customers

Aluminum Open Cell Ceilings

Jawdah Industrial Co. Ltd. manufacture superior quality Aluminum open cell ceilings, with various thicknesses, lengths, drops & cell sizes along with the appropriate Suspension Systems.

Jawdah Aluminum open cell ceilings are produced in Lay-on 60*60 Tiles and are available for both T-24 and T-15 Tee Grid Suspension Systems.

Jawdah's Aluminum open cell ceilings is made to meet the highest standards for open-cell ceilings, Suspension Systems, and hanging accessories.

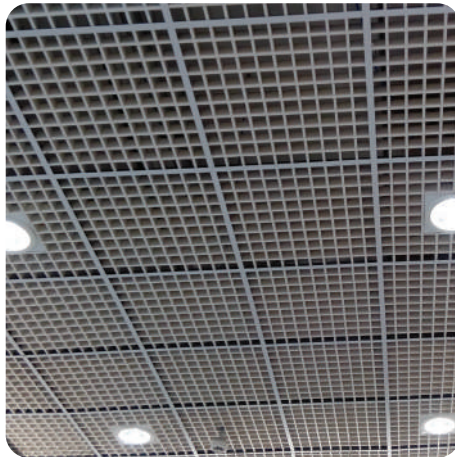


Aluminum Open Cell Lay-on
Ceiling Tiles

ALUMINUM OPEN CELL CEILING TILES

LAY-ON Ceiling Tiles

Jawdah Industrial Co. Ltd. manufactures superior quality Aluminum Open Cell lay-on ceiling Tiles, with various thicknesses, drops, cell sizes along with the appropriate Suspension. Jawdah's Aluminum Lay-on open-cell Tiles are available for both T-24 and T-15 Tee Grid Suspension Systems.

Jawdah's Aluminum Lay-on open-cell Tiles are made to meet the highest standards for Aluminum Lay-on open-cell Tiles, Suspension Systems, and hanging accessories, Designs varies according to the architect's specification and contractors demand.

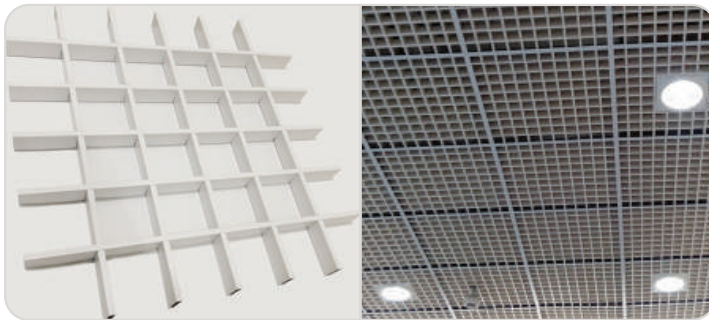

Features and Benefits:



High-quality properties of non-combustibility and mechanical stability.



Fire & moisture resistance, corrosive resistance & light reflection.



Easy to clean, durable, easy to install.




Environmentally friendly and recyclable.

Product Specifications

Material	Aluminum alloy 3005, 3105 comply with BS 476 PART 7-1987, ASTM B 209, ASTM D 2247, ASTM E 1477-98 and EN 1396.			
Available Thickness	0.3	0.4	0.5	0.6
	other thickness available upon request			
Colours	Available in white color & can be produced up to 110 different colours depending on quantity & client request.			
Finish	pre-painted polyester coating (primer +polyester) thk=25 microns from outside & (polyester) 5 microns from the back According to EN 1396.			
Suspension System	Suspension systems T-24 & T-15			
Fire rating (Raw Material)	Fire Rated Class 0 as per british standard BS 476 PART 7-1987. Surface Flame Spread test Class 0 as per british standard BS 476 PART 6 & 7.			
Humidity Resistance (Raw Material)	Humidity resistance According to ASTM D 2247			
Light Reflectance (Raw Material)	Light Reflectance more than 0.75 According to ASTM E 1477-98.			
Sizes	1- Panel Size 600*600mm (Metric / Imperial)			
	2-Cell size 50*50mm / 75*75mm / 100*100mm.			
	3-U-Size 40*10mm / 50*10mm (drop * width).			

Applications

Wide range for usage/application area (malls, supermarkets, halls, shops, offices, airports, exhibition centers, etc).

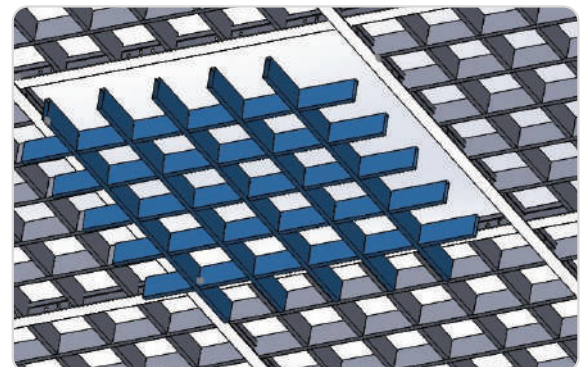

System Contents (Components)

1. Aluminum Open Cell LAY-ON Ceilings tiles.
2. Tee-Grid Suspension system (T24 /T15) (Main Tee, Cross Tee 120, Cross 60, Wall angle).
3. Suspension Accessories (Rod Hangers, Adjustment Clips & Anchor Bolts).